

**POWER PACK
12VDC @ ½ AMP
(17-2004-00)**

The Accu-Time (PN 17-2004-00) power pack is a twelve (12) volt DC (Direct Current) power source which provides the necessary voltage level to power up Accu-Time Data Collection Terminals (DCT), auxiliary peripheral devices, and communication converters.

The primary, or input, to this power pack accommodates a 60 Hertz 120 volt AC (Alternating Current) line level. The pack delivers an unregulated output, or secondary level, of 12 volts DC at .5 amperes of current.

The Accu-Time 12VDC power pack is an approved Class 2 Transformer assembly listed by both Underwriters Laboratory (UL), and Canadian Standards Association (CSA).

Housed in a high impact sealed plastic casing, the Accu-Time 12VDC @ 1/2 amp power pack comes equipped with a six- (6) foot output cord and 2.5mm inner-diameter termination plug (5.5mm outer-diameter). This female barrel plug is center conductor positive and mates to the entire Accu-Time product line.

GENERAL SPECIFICATIONS

Physical-


Dimensions: 2.35" H X 2.00" W X 1.63" D
(5.97cm x 5.08cm x 4.14cm)
Weight: 0.55 Lbs. (0.25kg)
Enclosure: Black Noryl[®], UL94V-0

Environmental-

Operating Temp: 32° to 110° F (0° to 45°C)
Relative Humidity: 20-90% Non-Condensing

Operating Parameters-

Power: Primary 120VAC 60 Hz 12W
Secondary 12VDC +- 5% @ 1/2 amp

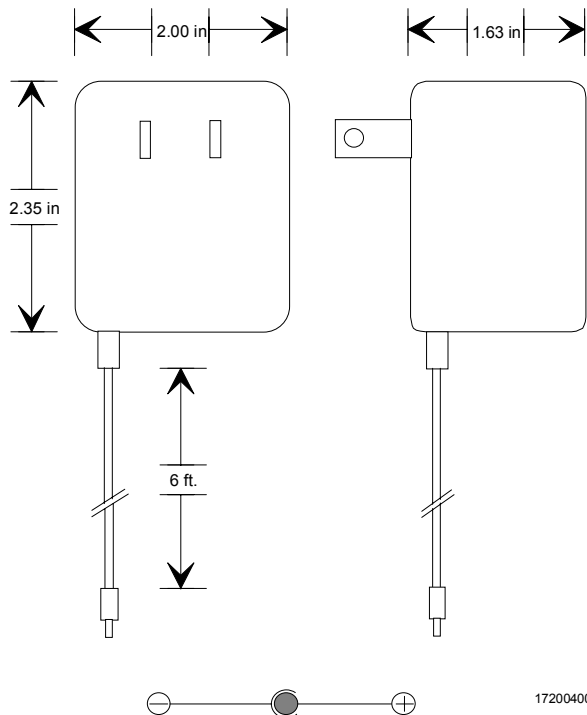

17200400

17200400.doc

