

**POWER PACK  
12VDC @ 1 AMP  
(17-2004-01)**

The Accu-Time (PN 17-2004-01) power pack is a twelve (12) volt DC (Direct Current) power source which provides the necessary voltage level to power up Accu-Time Data Collection Terminals (DCT) as well as Accu-Time auxiliary peripheral devices and communication converters.

The primary, or input, to this power pack accommodates a 60 Hertz 120 volt AC (Alternating Current) line level. The pack delivers an unregulated output, or secondary level, of 12 volts DC at 1 ampere of current.

The Accu-Time 12VDC power pack is an approved Class 2 Transformer assembly listed by both Underwriters Laboratory (UL), and Canadian Standards Association (CSA).

Housed in a high impact sealed plastic casing, the Accu-Time 12VDC @ 1 amp power pack comes equipped with a six- (6) foot output cord and 2.5mm inner-diameter termination plug (5.5mm outer diameter). This female barrel plug is center conductor positive and mates to the entire Accu-Time product line.

GENERAL SPECIFICATIONS

Physical-

Dimensions: 2.78" H X 2.24" W X 1.87" D  
(7.06cm x 5.69cm x 4.75cm)

Weight: 1.0 Lbs. (0.45kg)

Enclosure: Black Noryl<sup>®</sup> 7, UL94V-0

Environmental-


Operating Temp: 32° to 110°F (0° to 45°C)

Relative Humidity: 20-90% Non-Condensing

Operating Parameters-

Power: Primary 120VAC 60Hz 22W

Secondary 12VDC +/- 5% @ 1 amp

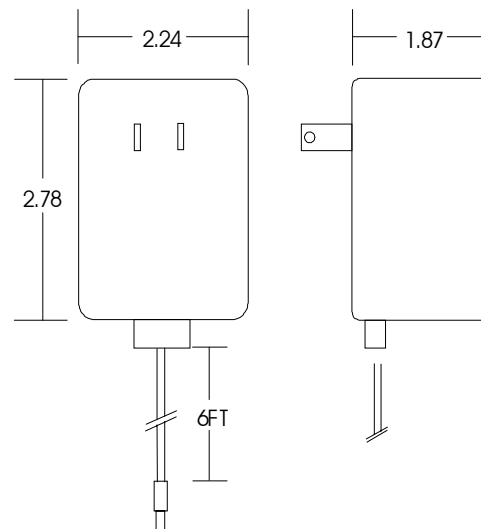

17200401.doc

