

**POWER PACK 12VDC @ 3 AMPS
DESK MOUNTABLE
17-2004-05**

The Accu-Time (PN 17-2004-05) power pack is a twelve- (12) volt DC (Direct Current) source which provides the necessary voltage level to power up Accu-Time Data Collection Terminals (DCT), auxiliary peripheral devices and communication converters.

The primary or input to this power pack accommodates a 60 Hertz 120 volt AC (Alternating Current) line level. The pack delivers an unregulated output or secondary level, of 12 volts DC at 3 amperes of current.


The Accu-Time 12VDC power pack is an approved Class 2 Transformer assembly listed by both Underwriters Laboratory (UL), and Canadian Standards Association (CSA).

Housed in a high impact sealed plastic casing, the Accu-Time 12VDC @ 3 amp power pack comes equipped with a six- (6) foot output cord and 2.5mm inner-diameter termination plug (5.5mm outer diameter). This female barrel plug is center conductor positive and mates to the entire Accu-Time product line. The size of this device requires desk mountability. A six- (6) foot AC power cord terminates to a wall outlet with a North American standard, 2 conductor male plug.

GENERAL SPECIFICATIONS


Physical-

Dimensions: 4.5"L x 3.0"W x 2.5"H
(11.4cmL x 7.6cmW x 6.4cmH)
Weight: 2.8 lbs. (1.3 kg.)
Enclosure: Black high impact plastic

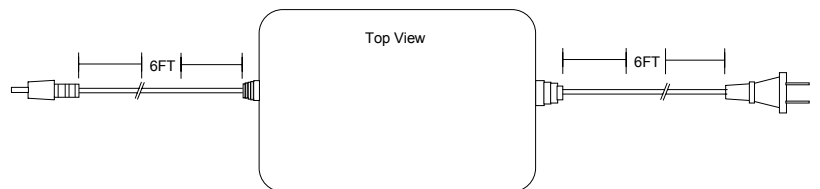

Environmental-

Operating Temperature: 32° to 110°F (0° to 45°C)
Relative Humidity: 20-90% Non-condensing

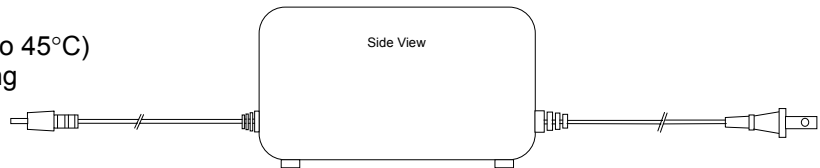

Operating Parameters-

Power: Primary 120VAC 60Hz 60W
Secondary 12VDC +-5% @ 3 amps



17200405