

**POWER PACK 15VDC @ .9 AMP
240VAC UK
17-2004-08**

The Accu-Time (PN 17-2004-08) power pack is a twelve (12) volt DC (Direct Current) source by United Kingdom standards which provides the necessary voltage level to power up Accu-Time Data Collection Terminals (DCT), auxiliary peripheral devices, and communication converters.

The primary, or input, to this power pack accommodates a 50 Hertz 240 volt AC (Alternating Current) line level. The pack delivers an unregulated output, or secondary level, of 15 volts DC at .9 amperes of current.

The Accu-Time 15VDC British power pack is an approved Class 2 Transformer assembly designed to meet BSI standards and in compliance with EMC and Low Voltage (LV) directives.

Housed in a black, high impact, flame-retardant plastic casing, the Accu-Time 15VDC @ .9 amp power pack comes equipped with a six- (6) foot output cord and 2.5mm inner diameter termination plug (5.5mm outer diameter). This female barrel plug is center conductor positive and mates to the entire Accu-Time product line. The input connector consists of three prongs that comply with British characteristics.

GENERAL SPECIFICATIONS

Physical-


Dimensions: 3.23"L x 2.24"W x 1.97"H
(8.20cmL x 5.69cmW x 5.00cmH)
Weight: 1.15 lbs. (0.52 kg.)
Enclosure: Black, flame retardant plastic

Environmental-

Operating Temperature: 32° to 110°F (0°-45°C)
Relative Humidity: 20-90% Non-condensing

Operating Parameters-

Power: Primary 240VAC 50 Hz
Secondary 15VDC +- 5% @ .9 amps.

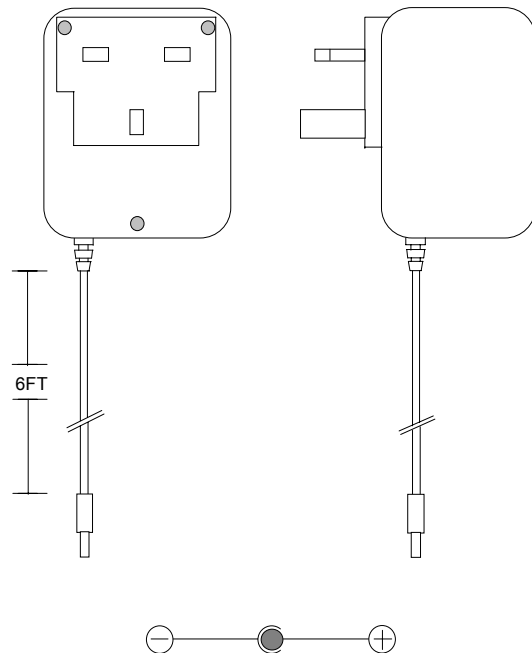

17200408