

**POWER PACK 5VDC @ .6 AMPS  
REGULATED  
17-2004-09**

The Accu-Time (PN 17-2004-09) power pack is a five (5) volt DC (Direct Current) source which provides the necessary voltage level to power up Accu-Time Data Collection Terminals (DCT), auxiliary peripheral devices and communication converters.

The primary or input to this power pack accommodates a 60 Hertz 120 volt AC (Alternating Current) line level. The pack delivers a regulated output or secondary level, of 12 volts DC at .6 amperes of current.

The Accu-Time 12VDC power pack is an approved Class 2 Transformer assembly listed by both Underwriters Laboratory (UL), and Canadian Standards Association (CSA).

Housed in a high impact sealed plastic casing, the Accu-Time 12VDC @ .6 amp power pack comes equipped with a six- (6) foot output cord and 2.5mm inner-diameter termination plug (5.5mm outer-diameter). This female barrel plug is center conductor positive and mates to the entire Accu-Time product line.

**GENERAL SPECIFICATIONS**

**Physical-**

Dimensions: 3.5"L x 2.5"W x 1.8"H  
(8.9cmL x 6.4cmW x 4.6cmH)

Weight: 0.90 lbs. (0.41 kg.)

Enclosure: Black high impact plastic


**Environmental-**

Operating Temperature: 32° to 110°F (0° to 45°C)

Relative Humidity: 20-90% Non-condensing

**Operating Parameters-**

Power: Primary 120VAC 60Hz 12W  
Second 12VDC +5% @ .6 amps

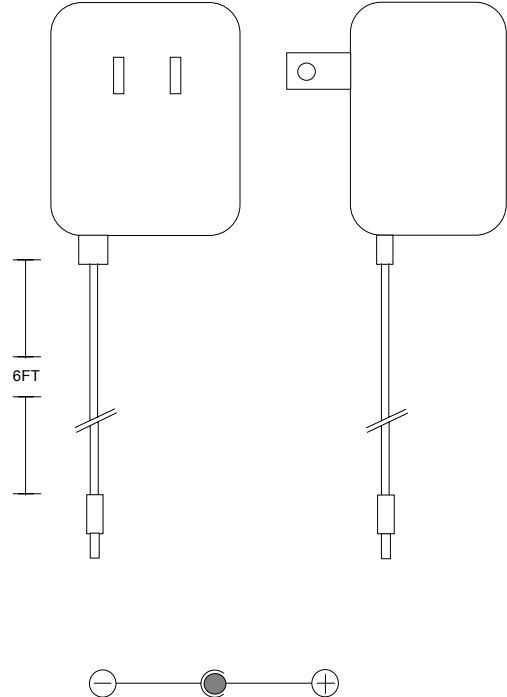

17200409

