


COMMUNICATION ADAPTER
RJ45/DB25P
98-9002-14

The Accu-Time (PN 98-9002-14) Communication Adapter serves as a data communication intermediary between an Accu-Time Data Collection Terminal (DCT) and host port equipped with a male 25-pin DB connector.

Packaged in a high impact plastic housing, the host interface adapter provides the necessary screw-down hardware for a secure termination on a 25-pin female computer port.

DCT EIA (Electronic Industries Association) RS232 data communication signals are sent in a bi-directional pattern over an eight- (8) conductor communication cable (Accu-Time PN 63-2003-03 or equivalent). Termination for this cable resides on the communication adapter via the on-board RJ45 modular jack.

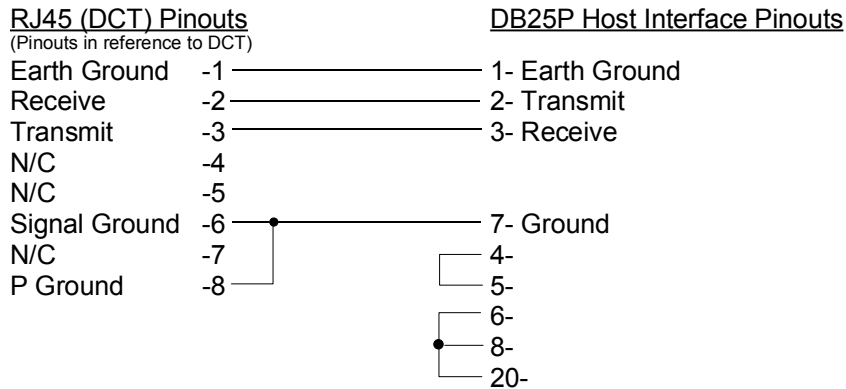

GENERAL SPECIFICATIONS

Physical-

Dimensions: 1.50"L x 2.20"W x 0.63"H
 (3.81cm x 5.59cm x 1.60cm)

Weight: 0.06 lbs. (0.03kg)


Enclosure: High impact plastic

Environmental-

Operating Temp: 32° to 110°F (0° to 45°C)
 Relative Humidity: 20-90% Non-condensing

Operating Parameters-

Power: Passive device

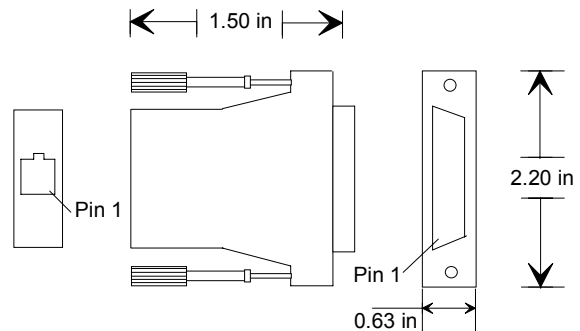

98900214

98900214

